



FORNETTI PER PIZZA

small pizza ovens



B1



B1+1

- Apparecchi per uso professionale
- Ideali per ristoranti, pizzerie e bar
- Struttura in acciaio inossidabile aisi 304
- Sportello con vetro per alte temperature
- Suolo forno in materiale refrattario
- Resistenze corazzate
- Timer al pannello di controllo
- Illuminazione interna
- Temperatura modello B1 e B2 da 50°C a 350°C
- Temperatura modello B4 da 60°C a 450°C
- Sfiatoio vapori
- Termostati per il controllo della temperatura
- Isolamento in fibra ceramica
- A richiesta cavalletto in acciaio inox



- Professional equipment
- Ideally suited for restaurants, bar, pizza shops
- Structured in AISI 304 s/steel
- Glass door for high temperature cooking
- Cooking base made from refractory material
- Stiffened heating element
- Timer panel control
- Internal lighting
- Temperature ranging from 50° up to 350° degree for models B1/B2
- Temperature ranging from 60° up to 450° degree for models B4
- Steam breather
- Thermostat Temperature control
- Tiled fibre insulation
- S/steel floor stand (on demand)

	A	B	C	Alimentazione Power supply Spannung	Potenza Motor power Leistung	Dimensioni interne Internal dimensions Innenabmessungen	Temperatura Temperature Temperatur	Peso Weight Gewicht	Dimensioni imballo Packing dimensions Verpackungsabmessung
	mm	mm	mm	Volt/Hz	kW	mm	°C	Kg.	mm
B1	585	480	245	230/50	1,6	410x360x80	50-350	23,0	660x540x330
B1+1	585	480	420	230/50	3,2	410x360x80x2	50-350	37,0	660x540x500
	A	B	C	Alimentación Alimentación eléctrica Pitruaune	Puissance moteur Potencia Мощность	Dimensiones interiores Dimension interior Bruttogewicht	Temperatura Temperatura Температура	Poids Peso Becc	Dimensiones embalaje Dimension del embalaje Размеры упаковки






B2



B2+2



B4

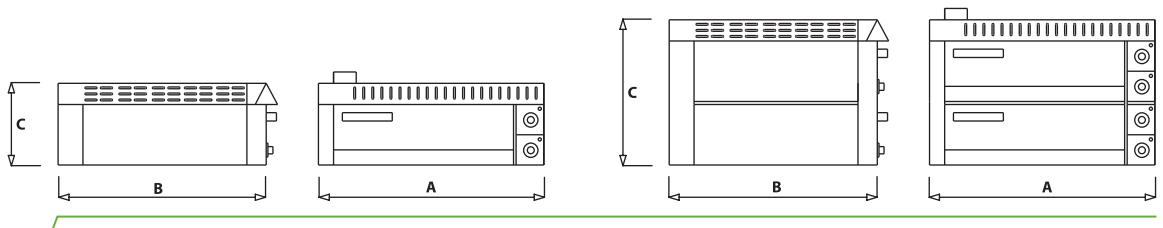

	A	B	C	Alimentazione Power supply Spannung	Potenza Motor power Leistung	Dimensioni interne Internal dimensions Innenabmessungen	Temperatura Temperature Temperatur	Peso Weight Gewicht	Dimensioni imballo Packing dimensions Verpackungsabmessung
	mm	mm	mm	Volt/Hz	kW	mm	°C	Kg.	mm
B2	745	660	270	230/50 - 230-400/50	3,2	520x500x115	50-350	50,0	790x880x390
B2+2	745	660	490	230/50 - 230-400/50	6,4	520x500x115x2	50-350	84,0	790x880x610
B4	1010	1120	430	230/50 - 230-400/50	4,8	700x700x145	60-450	80,0	1160x1030x570
B4+4	1010	1120	770	230/50 - 230-400/50	9,6	700x700x145x2	60-450	150,0	1160x1030x910
	A	B	C	Alimentation Alimentación eléctrica Tilmaue	Puissance moteur Potencia Motorleistung	Dimensions internes Dimension interior Innenabmessung	Temperatura Temperature Temperatur	Poids Peso Bec	Dimensions emballé Dimensió del embalaje Packungsabmessung